


Technical data

UP Series
UP 15-18BUC5/BUC7

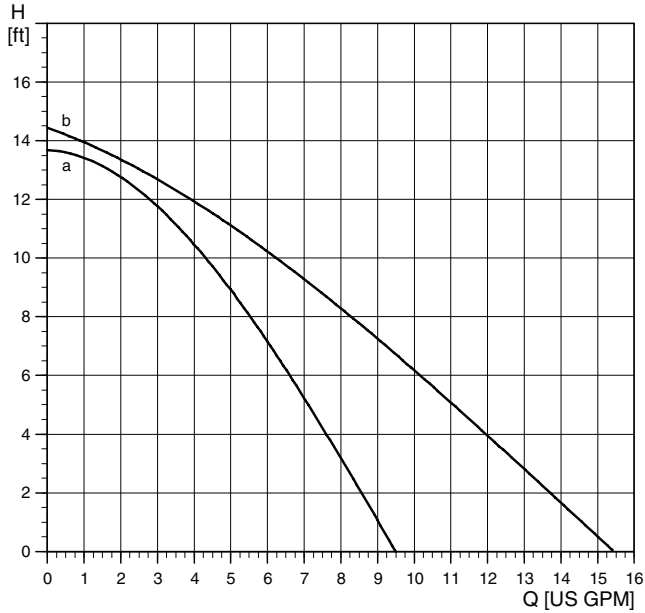



TM03 8428 1507

Flow range: 0-14.7 U.S. gpm
 Head range: 0-14.5 feet
 Motors: 2-pole, single-phase
 Max. liquid temperature: 230 °F (110 °C)
 Min. liquid temperature: 36 °F (2 °C)
 Max. system pressure: 145 psi

Model	Volts	Amps	Watts	Hp	Capacitor
UP 15-18BUC5	115	0.55	60	1/25	8μF/180 V
UP 15-18BUC7	115	0.55	60	1/25	8μF/180 V



Position	System type	Description
a	Open	UP 15-18BUC5
b	Open	UP 15-18BUC7

UP 15-18BUC5



TM03 8549 1907

UP 15-18BUC7



TM03 8553 2407

Model type	Product number	A	B	C	D	E	F	Connection type and size	Shipping weight [lbs]
UP 15-18BUC5	59896123	6 1/2	5 1/4	4	3 3/16	3 1/4	-	1/2" sweat	7 1/4 lbs
UP 15-18BUC7	59896124	7 3/4	5 1/4	4	3 3/4	3 1/4	-	3/4" sweat	8 lbs