


# Technical data

UP Series  
UP 15-42BUC5/BUC7

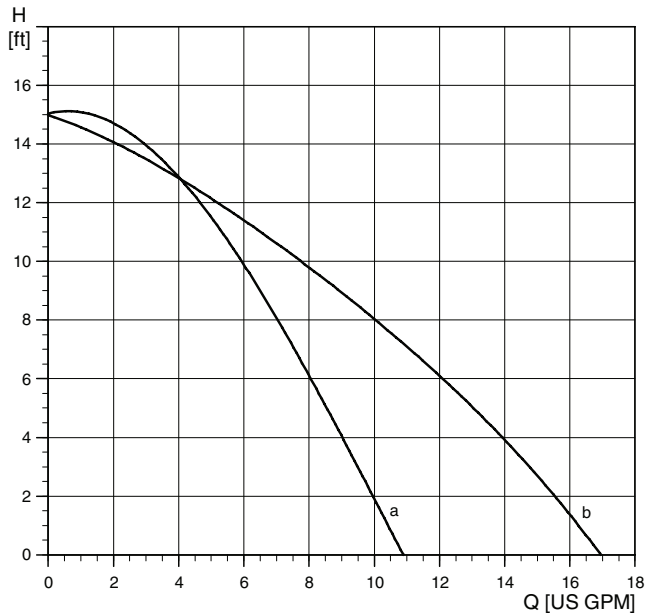


TM03 8431 1507

Flow range: 0-17 U.S. gpm  
 Head range: 0-15 feet  
 Motors: 2-pole, single-phase  
 Max. liquid temperature: 205 °F (96 °C)  
 Min. liquid temperature: 36 °F (2 °C)  
 Max. system pressure: 145 psi

Model	Volts	Amps	Watts	Hp	Capacitor
UP 15-42BUC5	115	0.74	85	1/25	10µF/180 V
UP 15-42BUC7	115	0.74	85	1/25	10µF/180 V


Position	System type	Description
a	Open	UP 15-42BUC5
b	Open	UP 15-42BUC7

UP 15-42BUC5

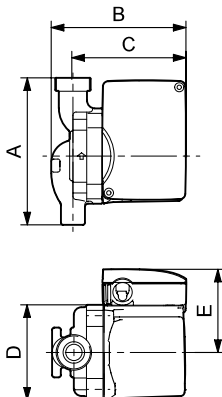

TM03 8549 1907

UP 15-42BUC7

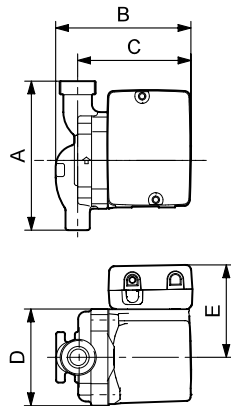

TM03 8753 2407

Model type	Product number	A	B	C	D	E	F	Connection type and size	Shipping weight [lbs]
UP 15-42BUC5	59896150	6 1/2	5 1/4	4	3 3/16	3 1/4	-	1/2" sweat	6 1/2
UP 15-42BUC7	59896151	7 3/4	5 1/4	4	3 3/4	3 1/4	-	3/4" sweat	6 3/4