


## Super Brute

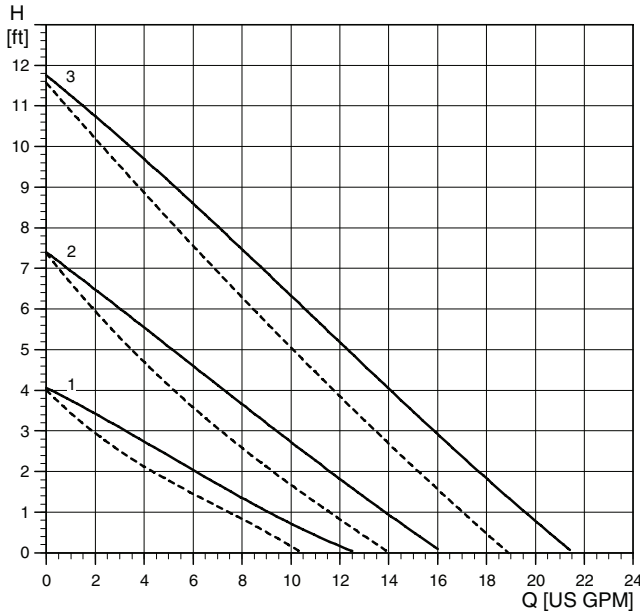

TIM03 8850 2607

Flow range: 0-21.5 U.S. gpm  
 Head range: 0-12 feet  
 Motors: 2-pole, single-phase  
 Max. liquid temperature: 165 °F (74 °C)  
 Min. liquid temperature: 36 °F (2 °C)  
 Max. system pressure: 145 psi

**Note:** If the UP pump is equipped with a timer, the maximum liquid temperature is 150 °F (66 °C).


Model	Spd	Volts	Amps	Watts	Hp	Capacitor
UPS 15-35SUC/SFC	3	115	0.95	110	0.15	10µF/180 V
	2		0.75	85	0.11	
	1		0.06	61	0.08	

— Without check valve

- - - With check valve


Position	System type	Description
3	Open	High speed
2	Open	Medium speed
1	Open	Low speed

UPS 15-35SFC

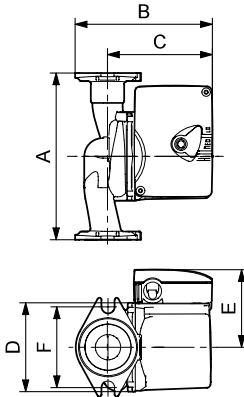

TIM03 8779 2507

UPS 15-35SUC/TLC

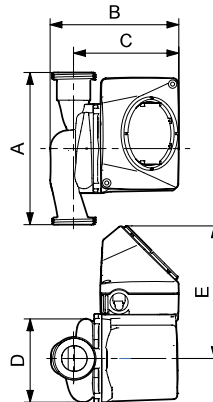

TIM03 8778 2507

Model type	Product number	A	B	C	D	E	F	Connection type and size	Shipping weight [lbs]
UPS 15-35SFC	59896772	6 8/16	5 8/16	4 2/16	3 14/16	2 15/16	3 2/16	GF15/26	6
UPS 15-35SUC	59896778	5 14/16	5 1/16	4 2/16	3 7/16	2 15/16	-	GU125	5.4
UPS 15-35SUC/TLC	59896780	5 14/16	5 1/16	4 2/16	3 7/16	2 15/16	-	GU125	6.2

Note: LC/TLC Models have 6-foot 3-prong power cord. Removable check valve.