


Super Brute

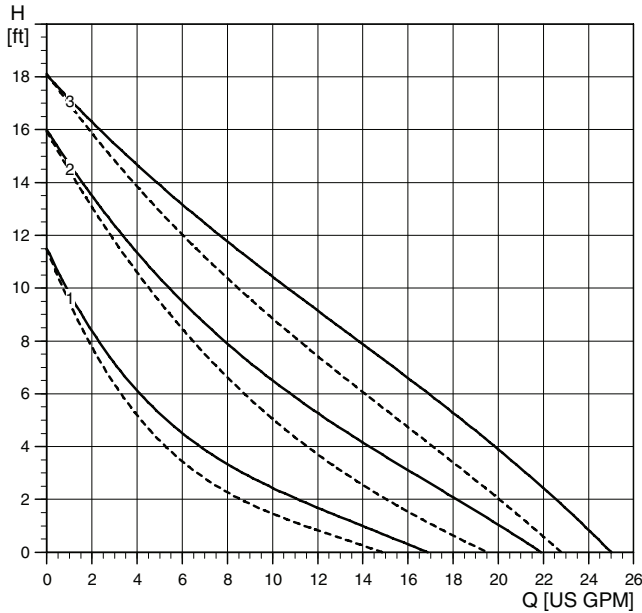

TM03 8849 2607

Flow range: 0-25 U.S. gpm
 Head range: 0-18 feet
 Motors: 2-pole, single-phase
 Max. liquid temperature: 230 °F (110 °C)
 Min. liquid temperature: 36 °F (2 °C)
 Max. system pressure: 145 psi


Note: If the UP pump is equipped with a timer, the maximum liquid temperature is 150 °F (66 °C).

Model	Spd	Volts	Amps	Watts	Hp	Capacitor
UPS 15-55SFC	3	115	0.75	87	0.12	10µF/180 V
	2		0.69	77	0.1	10µF/180 V
	1		0.53	58	0.08	10µF/180 V
UPS 15-55SUC	3	115	0.69	87	0.12	10µF/180 V
	2		0.66	74	0.1	10µF/180 V
	1		0.31	56	0.08	10µF/180 V

— Without check valve
 - - - With check valve


Position	System type	Description
3	Open	High speed
2	Open	Medium speed
1	Open	Low speed

UPS 15-55SFC

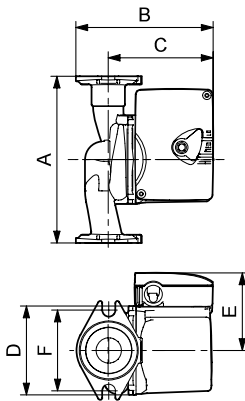

TM03 8779 2507

UPS 15-55SUC/TLC

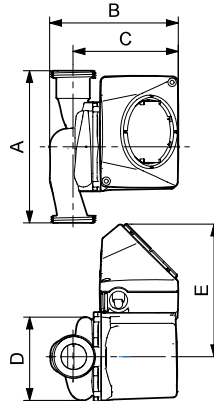

TM03 8778 2507

Model type	Product number	A	B	C	D	E	F	Connection type and size	Shipping weight [lbs]
UPS 15-55SFC	59896773	6 8/16	5 8/16	4 2/16	3 14/16	2 15/16	3 2/16	GF15/26	6
UPS 15-55SUC	59896781	5 14/16	5 1/16	4 2/16	3 7/16	2 15/16	-	GU125	5.4
UPS 15-55SUC/TLC	59896783	5 14/16	5 1/16	4 2/16	3 7/16	2 15/16	-	GU125	6.2

Note: LC/TLC Models have 6-foot 3-prong power cord. Removable check valve.